



VRLA Rechargeable Battery

EB80-12

FEATURES

- Absorbent Glass Mat technology for efficient gas recombination
- Maintenance free(no water topping-up required)
- No free acid(Non-spillable battery)
- Can be used in any orientation(excluding used inverted)
- The battery is designed for high power & high cyclic usage
- Its design life is approx.300 cycles at 100% discharge in cycle service at 77°F/25°C

APPLICATION

- UPS
- Lawn Mowers
- Wheelchairs
- Electric Motorcycle
- Golf-Carts




SPECIFICATIONS


Nominal Voltage	12V	
Nominal Capacity	20 Hour Rate (4.0 A, 10.5V)	80 Ah
	5 Hour Rate (15A, 10.5V)	75 Ah
	2 Hour Rate (32 A, 10.5V)	64 Ah
Approx. Weight	25.5Kg(56.22lbs.)	
Terminals	I2 (M6 Female thread)	
Max. Discharge Current	800 A (5 sec.)	
Max. Charge Current	24.0 A	
Operating Temperature Range	Charge	0°C~40°C(32°F~104°F)
	Discharge	-20°C~50°C(-4°F~122°F)
	Storage	-20°C~40°C(-4°F~104°F)
Self Discharge	< 3% per month (25°C)	
Internal Resistance	≤5m Ω (Fully Charged)	

CONTAINER MATERIAL

- Standard: ABS(UL 94-HB)
Model Name: EB80-12
- Optional: Flame Retardant ABS (UL 94-V0)
Model Name: EB80-12FR

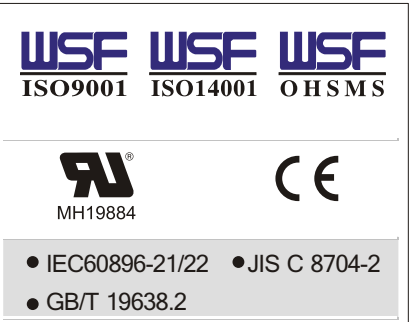


OUTER DIMENSIONS mm(inch)	Length (L)	Width (W)	Container Height (H)	Total Height (TH)
		260±2(10.24±0.08)	168±2(6.61±0.08)	215±2(8.46±0.08)

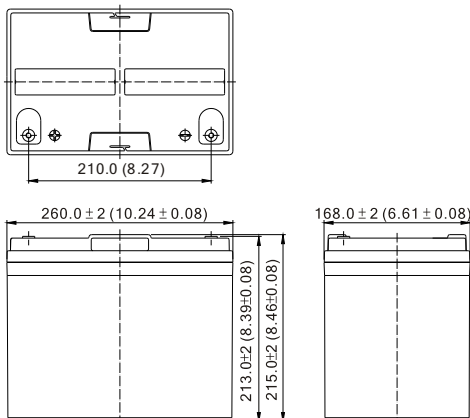


TERMINAL TYPE

- Terminal I2




Terminal Hardware Initial Torque: I2(5.5Nm±5%)

EB80-12 (EB80-12FR) discharge characteristics (25°C/77°F)

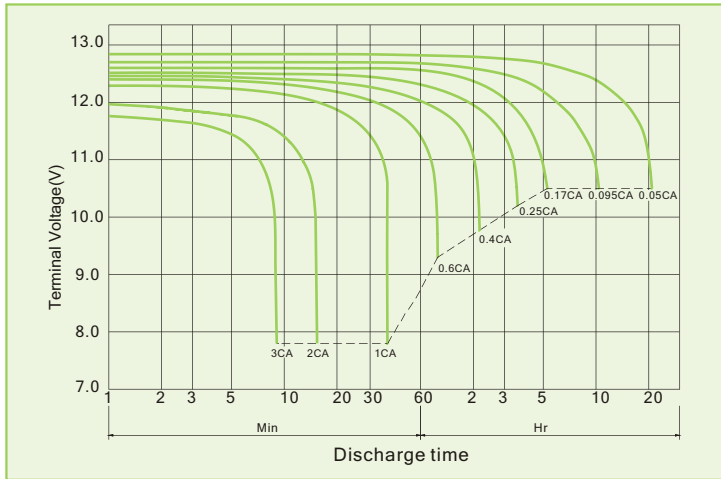


Battery Charging Characteristics

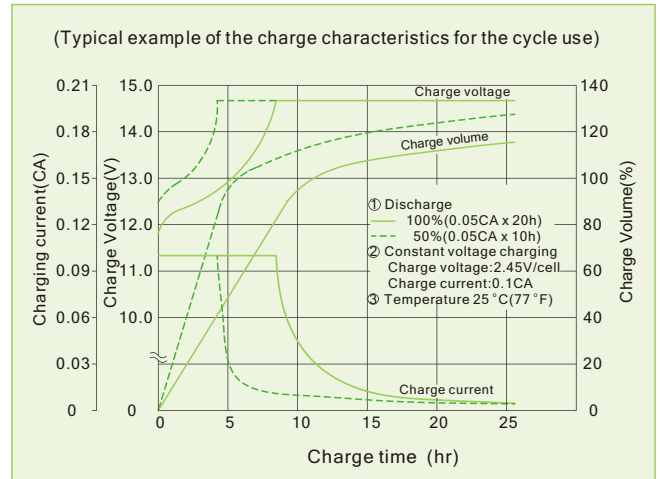

Charging Procedure

Application	Charging method	Charging Voltage at 25°C (V/cell)	Temperature compensation coefficient of charging voltage (mV/°C/cell)	Max. charging current (CA)	Charging time 0.1CA, 25°C (h)		Temp (°C)
					100% discharge	50% discharge	
For standby power Source	Constant voltage & Constant current charging (with current restriction)	2.25~2.30	-3	0.3	24	20	0~40 (32~104°F)
For cycle service		2.40~2.50	-4	0.3	16	10	

Battery Life Characteristics of Cyclic Use

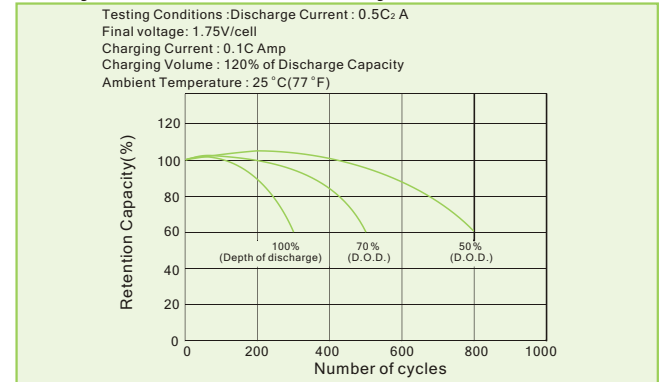

Constant power discharge characteristics at 25°C/77°F Unit: W

Discharge Time / F.V. (V/cell)	10 Min	15 Min	30 Min	40 Min	1 Hr	2 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	2154.7	1744.8	1097.4	870.1	664.0	374.4	280.0	177.4	89.8	46.98
1.75V	2334.4	1826.7	1139.5	901.6	683.2	384.0	285.3	179.7	91.2	48.00
1.70V	2418.7	1881.9	1164.5	919.7	695.2	387.8	288.0	181.1	91.7	48.22
1.65V	2476.5	1925.9	1181.4	932.5	704.8	391.7	290.7	182.4	91.9	48.34
1.60V	2525.6	1963.8	1193.4	941.9	712.0	393.6	292.0	182.4	91.9	48.37
1.50V	2576.3	2003.0	1205.4	951.4	719.5	393.6	293.8	182.4	91.9	48.37

Constant current discharge characteristics at 25°C/77°F Unit: A

Discharge Time / F.V. (V/cell)	10 Min	15 Min	30 Min	40 Min	1 Hr	2 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	189.6	151.7	93.0	73.4	55.8	31.2	23.4	14.8	7.5	3.92
1.75V	205.4	158.9	96.6	76.2	57.4	32.0	23.8	15.0	7.6	4.00
1.70V	213.0	163.7	98.7	77.6	57.6	32.3	24.0	15.1	7.6	4.02
1.65V	218.1	167.5	100.2	78.7	59.2	32.6	24.2	15.2	7.7	4.03
1.60V	222.4	170.7	101.1	79.5	59.8	32.8	24.3	15.2	7.7	4.03
1.50V	226.7	174.2	102.1	80.3	60.5	32.8	24.5	15.2	7.7	4.03

All data and artworks shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.
 For operation, please refer to the instruction from technical manual.

A/5 REV. Mar. 2015

USA:
 B&B BATTERY(USA) INC.
 6415 RANDOLPH ST.COMMERCE, CA,90040 U.S.A.
 TEL:1-323-278-1900.1-800-278-8599
 FAX:1-323-278-1268
 E-Mail:sales@bb-battery.com

CHINA FACTORY:
 B.B. BATTERY CO., LTD.
 CHENG DONG TRIAL AREA,HUANG GANG,
 RAOPING, GUANG DONG,CHINA,515700
 TEL:86-768-7601001-2
 FAX:86-768-7601469
 E-Mail:maggy@bb-battery.com

EUROPE:
 B&B BATTERY(EUROPE) B.V.
 SUITE 8, HAAKSBERGWEG 33, 1101
 BP AMSTERDAM, THE NETHERLANDS
 TEL: 31-30-320-0190
 MOBILE: 852-9128-2711
 E-Mail: dliu@bb-battery.com

HONG KONG:
 B&B BATTERY(Hong Kong) Co.
 TEL:852-2311-4918
 FAX:852-2739-1182
 E-Mail:bbhk@hkstar.com

JAPAN:
 B&B BATTERY(JAPAN) CO., LTD.
 1375-11 NARAHARA-MACHI,HACHIOJI,
 TOKYO 193-0803,JAPAN.
 TEL:81-426-25-6375
 FAX:81-426-25-6375
 E-Mail:miyata@bb-battery.com

TAIWAN:
 B.B. BATTERY(TAIWAN) CO., LTD.
 TEL:886-6-502-5150
 FAX:886-6-589-8087
 E-Mail:kevinlin@bb-battery.com